

VOLUME 6 SURVEILLANCE**CHAPTER 1 PART 91 INSPECTIONS****Section 4 Conduct a Part 91 Ramp Inspection****6-87 PROGRAM TRACKING AND REPORTING SUBSYSTEM (PTRS) ACTIVITY CODE. 1661**

6-88 OBJECTIVE. The objective of this task is to determine that an airman or operator is in continuing compliance with Title 14 of the Code of Federal Regulations (14 CFR) during an actual operational situation. Successful completion of this task results in an indication in district office files of either a satisfactory or an unsatisfactory inspection.

6-89 GENERAL. An operations inspector conducts ramp inspections on airmen and aircraft operating under various 14 CFR parts. This section deals with 14 CFR part 91 operators, which are by far the most numerous. Ramp inspections involving other 14 CFR parts are found in the appropriate related task heading.

A. Definitions.

- 1) For the purposes of this chapter, an operator may be a pilot, executive/corporate operator, air agency, etc.
- 2) A ramp inspection is defined as surveillance of an airman, operator, or air agency during actual operations at an airport or heliport.

B. Inspector Conduct. The inspector shall always have identification available, since an airman or operator may or may not know an inspector.

- 1) For special considerations concerning surveillance at fly-ins, airshows, and other gatherings of general aviation aircraft and airmen, see Chapter 11, Section 10 (this volume), Surveillance of an Aviation Event, subparagraphs 6-2373A1-4.
- 2) An inspector must not board any aircraft without the knowledge of the crew or operator. Some operators may prefer to have a company representative present to answer questions.
- 3) If the surveillance will delay a flight, the inspector should use prudent judgment whether or not to continue.
- 4) The inspector should also bear in mind that he or she may not be able to complete all items on every ramp inspection.

C. Common Reasons for a Ramp Inspection. Ramp inspections may result when the inspector:

- Observes an unsafe operation in the traffic pattern or in the ramp.

- Is notified by ATC of an unsafe operation.
- Conducts normal surveillance.

D. Ramp Inspections Planned for a Specific Operator. Most ramp inspections are not planned for a specific operator; however, when they are planned, the inspector should review the office files. Some of the reasons a ramp inspection might be planned include:

- Recurring complaints
- Suspected violations of 14 CFR
- Special emphasis program required by the regional office or headquarters

E. Title 14 CFR Part 135. Procedures and details of a part 135 ramp inspection are found in chapter 2 of this volume.

F. Additional Background. When conducting a ramp inspection of an executive/corporate operator or a part 125 deviation holder, see Section 1 (this chapter), Inspect an Executive/Corporate Operator.

6-90 RAMP INSPECTION JOB AIDS. The part 91 ramp inspection job aid (Figure 6-5) is a job aid provided for the inspector's use in accomplishing this task. This job aid is used when conducting a ramp inspection of a single pilot, a flight instructor, an air agency, or other less complex ramp inspections. The executive/corporate operator ramp inspection job aid (refer to Related Task #55, Inspect an Executive/Corporate Operator) should be used for corporate operators of large and turbine powered or turbojet aircraft or part 125 deviation holders. If the operations inspector is accompanied by an airworthiness inspector, then the "aircrew" section is for the operations inspector's use, and the "aircraft" section is for the airworthiness inspector's use.

6-91 AIRWORTHINESS COORDINATION. If an airworthiness inspector is not available for the inspection and suspected airworthiness discrepancies are discovered during the inspection, the operations inspector must coordinate with an airworthiness inspector at the district office to determine the disposition of the discrepancy. This should be accomplished before completing the inspection.

6-92 DISCREPANCIES FOUND DURING INSPECTION. The inspection should be continued unless a discrepancy is discovered that would affect the safety of flight or dispatch of the aircraft which may result in a violation of 14 CFR. All discrepancies must be noted on the job aid and discussed with the operator. The inspector may explain how to correct discrepancies found during the inspection, but the inspector should keep in mind that it is the operator's responsibility to ensure that items are in compliance with 14 CFR.

A. Responsibility for Airworthiness. The airworthiness of the aircraft is the responsibility of the pilot (part 91, section (§) 91.3) and monitored by airworthiness inspectors. However, if an operations inspector finds an obviously unairworthy aircraft, it is the responsibility of the operations inspector to see that an Aircraft Condition Notice (FAA Form 8620-1) is issued. If accompanied by an airworthiness inspector, he or she may issue FAA

Form 8620-1. However, an operations inspector may have to contact the nearest Flight Standards office to have an airworthiness inspector issue the notice.

B. FAA Form 8620-1. The form (Figure 6-6) is in triplicate. The top and middle sheet (both white) go to the airworthiness unit, which mails the original to the owner/lessee and retain the second. The buff-colored card must be placed on the aircraft where the operator can easily see it.

6-93 PILOT DOCUMENTS. When asked to present airman and medical certificates, a pilot may present a radio license formerly required by the FCC or make a statement that he or she does not have one. The FCC has determined that pilots are no longer required to have this license unless flying internationally.

6-94 PILOT CONDITION. If an inspector has reason to suspect a pilot or other required crewmember under the influence of alcohol, see section 6 of this chapter.

6-95 AIRCRAFT DOCUMENTS. Following are considerations when examining aircraft documents, including registration and airworthiness certificates and approved flight manuals. Discrepancies found concerning the airworthiness or registration certificates shall be brought to the attention of the operator, documented, and given to the airworthiness unit for action.

A. N-Numbers. The N-number on the registration certificate must match the N-number on the airworthiness certificate.

B. Registration Certificate. If the registered owner has changed you may see a temporary registration (Pink Slip) which is good for 120 days. If the ownership has changed without a Pink Slip or the N-numbers do not match, the registration is not valid.

C. Radio Station License. An aircraft FCC radio license is required although the FAA does not regulate the requirement. The license may be for that particular N-number or a fleet license. The expiration date of the license is in the upper right hand corner. Any discrepancy concerning the radio license should be brought to the attention of the operator only.

D. Flight Manual. An Aircraft Flight Manual is required to be on board the aircraft (§ 91.9) along with the appropriate markings and placards.

E. Weight and Balance Information. Weight and balance documents, including a list of equipment, must be on board the aircraft. Some multiengine operators have Minimum Equipment Lists (MELs) with a letter of authorization issued by a district office. These constitute a supplemental type certificate for the aircraft and must be on board. The inspector should compare inoperative equipment to the MEL to assure compliance. (Refer to Related Task #58, Approve a Minimum Equipment List.)

F. Airworthiness Certificate. The certificate most often seen by an inspector is a standard airworthiness certificate, which is issued for normal, utility, acrobatic, and transport category aircraft. A restricted, limited, or experimental certificate must be accompanied by a list

of limitations and conditions (sections (§§) 21.183-191) necessary for safe operation. A Special Flight Permit (Ferry Permit) is issued to aircraft that may not be airworthy but are capable of safe flight under certain conditions which are listed and issued with the permit (§§ 21.197, 91.203, and 91.213). Review the list of limitations and conditions to assure a valid airworthiness certificate. The N-number on the certificate must match the N-number on the fuselage to be valid.

6-96 FOREIGN PILOTS OR AIRCRAFT. An operator with a foreign pilot certificate and an aircraft registered in the same foreign country (e.g., Canadian pilot, Canadian-registered aircraft) may operate in the U.S.; however, the holder of a foreign pilot certificate may not operate a U.S. registered aircraft here without first receiving a U.S. pilot certificate. (refer to Related Task #29, Issue an Airman Certificate on the Basis of Foreign License.) The foreign pilot may show a current medical of his or her country or a U.S. medical.

6-97 IFR HELICOPTER OPERATIONS. Most rotorcraft are certificated VFR only. Under Special Federal Regulation (SFAR) 29-4 some rotorcraft have been approved for IFR. Operators holding approval issued before March 2, 1983, under SFAR 29 through SFAR 29-4 may continue to use that approval until surrendered, revoked, or otherwise terminated, or there is a change in aircraft ownership. After March 2, 1983, the new applicant must have met all certification requirements of 14 CFR part 27 (Normal Category Rotorcraft) or 29 (Transport Category Rotorcraft).

A. Helicopter Documents. A letter of approval (Figure 6-7) with a list of limitations is issued for the helicopter. This letter, list of limitations, and a copy of SFAR 29-4 combine to become a Supplemental Type Certificate for the rotorcraft and must be on board in the Rotorcraft Flight Manual.

B. Pilot Documents. The operator may be approved for a one-pilot or a two-pilot crew as listed in the letter of approval.

- 1) Each pilot must have an instrument - helicopter rating on his or her pilot certificate.
- 2) Each pilot must have a current instrument proficiency check accomplished in one of the rotorcraft listed on the letter of approval. The initial instrument proficiency check must include a check in each type rotorcraft authorized. Subsequent 6-month checks must be in at least one type of rotorcraft in rotation.
- 3) A single pilot operation must have demonstrated ability using a Stability Augmentation System (SAS) or an autopilot.
- 4) The pilot may produce an FAA Form 8410-3, Airman Competence/Proficiency Check if the check was done under part 135 or a logbook endorsement (or copy of one). If a pilot took this check in the calendar-month before or after the month in which it was due, the check is considered to have been done when due.

6-98 CATEGORY II/III AUTHORIZATIONS. Category II/III operators under part 91 are issued an authorization with provisions which remain in effect one year. Operators with approved maintenance programs may be renewed for two years. (Refer to Related Task #59, Approve Category II or III Approach Minimums and Manual.)

A. Aircraft Documents. The authorization or a facsimile must be on board. The operator must comply with a Category II/III manual which must also on board. Category II/III authorizations other than part 91 are authorized by Operations Specifications.

B. Pilot Documents. Category II/III operators must use a PIC and, in some cases, an SI. The PIC must have a Letter of Authorization based on a practical test. Initially the PIC must be checked in each type airplane authorized. Each 6 months thereafter the PIC must be checked in at least one type to renew all types. However, an authorization for any particular type aircraft cannot be renewed beyond 12 months after the practical in that type. If the pilot passes a practical test for renewal the month before expiration, he or she is considered to have passed during the month the authorization expired. There is no grace month as in part 125 or 135. A Part 135 Airman Proficiency Check, FAA Form 8410-3, endorsed for Category II or III or a logbook endorsement (or facsimile of one) may be substituted for a letter of authorization.

6-99 PREREQUISITES AND COORDINATION REQUIREMENTS.

A. Prerequisites. This task requires knowledge of the regulatory requirements of parts 61 and 91 and FAA policies and qualification as an aviation safety inspector (operations).

B. Coordination. This task requires coordination with the airworthiness unit and with the airman records section of AFS-760, Airmen Certification Branch.

6-100 REFERENCES, FORMS, AND JOB AIDS.

A. References.

- 14 CFR parts 1, 63, 67, and 125
- FCC Part 87
- Category II/III authorization and manual, if applicable
- PTRS Field Office Manual

B. Forms.

- FAA Form 8000-36, PTRS Transmittal Form
- FAA Form 8620-1, Aircraft Condition Notice (Figure 6-6)

C. Job Aids. Sample letters and figures

6-101 PROCEDURES.

A. PTRS. Open PTRS file.

B. Pre-Inspection Activities.

- 1) Review the office file on the operator to determine if any prior violations of 14 CFR, past complaints, or inspection reports exist.
- 2) Note review findings and any areas of emphasis on the part 91 job aid.

C. Location of Inspection. Proceed to the airport where the ramp inspection will be conducted. Determine whether or not it is necessary to identify FAA presence to the airport operator or other operators on the airport (Figure 6-8). Use the part 91 job aid to conduct the ramp inspection.

D. Inspect Airman Documents.

- 1) Inspect airman certificates to determine appropriate ratings and limitations for the type of operations being conducted.
- 2) Determine if certificates are genuine and legible. (See Volume 5, Chapter 2, Part 61 Certification of Pilots and Flight Instructors, Section 1, General)
- 3) Inspect airman medical certificates to determine if they are current and the appropriate class. Check for a Statement of Demonstrated Ability, if required, on the medical certificate.
- 4) If available, examine pilot logbooks (or other reliable records) to determine recency of experience and qualifications, such as:
 - Biennial flight review
 - Instrument proficiency check
 - PIC proficiency check
- 5) If applicable, inspect pilot Category II and/or Category III authorization letters for currency. (§ 91.189)
- 6) Note any discrepancies on the job aid.

E. Record Aircraft Information. Record the N-number, make and model, and whether leased or owned on the job aid. If the vehicle is an ultralight, see Related Task #66, Inspect an Ultralight Vehicle.

F. Inspect Aircraft. (Applies to all aircraft)

- 1) Determine that the proper airworthiness certificate is displayed at the cabin or cockpit entrance. Note that it is legible to passengers and/or crew.

- 2) Examine the registration certificate to ensure that it is issued for that specific aircraft. Determine that the N-number on the certificate matches the N-number on the aircraft. Check that the certificate is issued to the present owner of the aircraft.
- 3) Check the radio station license and note its expiration date. If it has expired, inform the operator of the pertinent FCC requirements.
- 4) Determine that there is a current, approved Airplane Flight Manual (AFM) on board the aircraft.
- 5) Determine if there is current weight and balance information in the aircraft by examining the AFM. Compare equipment listed on the weight and balance form to the actual equipment installed.
- 6) If applicable, check the MEL to determine that it has:
 - a) Been issued by N-number and serial number to the aircraft operator
 - b) A Letter of Authorization from a district office; check deferred items for placards and dates (Refer to Related Task #58, Approve a Minimum Equipment List.)
- 7) If a Letter of Deviation from part 125 has been issued, ensure that a true copy is in the aircraft.
- 8) If the aircraft is leased, determine that a copy of the lease agreement or contract is being carried in the aircraft. Note the expiration date on the lease and determine if the lease is still valid.
- 9) If applicable, determine that copies of the approved Category II or Category III authorization and manual are in the aircraft.
 - a) Review the Category II/III authorization and provisions.
 - b) Check that the aircraft make, model, and N-number is listed.
 - c) Consider any instrument, airport, or weather requirements listed there or in the manual.
- 10) If the aircraft operates under a letter of authorization for North Atlantic (NAT) Minimum Navigation Performance Specification (MNPS) airspace, determine if the letter is carried on board the aircraft.
- 11) Determine if pertinent and current aeronautical charts are available.
- 12) Ask the operator what type of instrument operations are conducted, for example: ILS, DME, RNAV. Determine if the required radio and navigational equipment is installed for the specific operations conducted.

G. Inspect Aircraft.

- 1) Determine the general airworthiness of the aircraft by inspecting the aircraft's exterior in a manner similar to a preflight inspection.
- 2) Inspect seats and safety belts for installation and condition.
- 3) If applicable, determine if a current VOR Equipment Check has been performed.
- 4) Determine if an ELT (Emergency Locator Transmitter) is installed. Check the expiration date of the battery.
- 5) Determine that the aircraft identification plate exists and is secured to aircraft fuselage exterior. (§ 45.11(a))

H. Inspection Items for Large and Turbine-Powered Multiengine Airplanes Only.

In addition to the items in subparagraphs F1 through 12 and G1 through 4, inspect the following items:

- 1) Determine if the aircraft has an emergency checklist available to the flight crew.
- 2) Determine if the aircraft has one engine inoperative climb performance data available to the flight crew.
- 3) Determine if pertinent and current aeronautical charts are available.
- 4) Determine if a flashlight having two D-sized cell batteries, or equivalent, is accessible from the pilot station and in good working order.
- 5) If the operator conducts overwater operations, determine that the required radio equipment is installed (§ 91.511).
- 6) For transport category aircraft only, have the operator demonstrate that the aural speed warning device is in operating condition.
- 7) Have the operator activate the smoking and safety belt signs. Determine if they are in operable condition. Check operation from the cockpit and the cabin. If applicable, at this time conduct the altitude alerting system or device check.
- 8) Note whether the operator uses passenger briefing cards to supplement oral briefings. If so, inspect the cards for location and correct information (§ 91.519).
- 9) Determine if appropriate emergency equipment is on board the aircraft (§ 91.513).
- 10) If the operator conducts overwater operations, inspect the following survival equipment for installation and condition:

- Life preservers with approved survivor locator light (for each occupant)
- Life rafts with approved survivor locator light (amount should accommodate the number of occupants of the aircraft)
- Pyrotechnic signaling devices (for each life raft)
- Emergency radio signaling device
- Lifeline
- Appropriately equipped survival kit

I. Inspection Items for Turbojet Powered Civil Airplanes Only. In addition to the items in subparagraphs F1 through 12, G1 through 4, and H1 through 10, inspect the altitude alerting system or device for installation and operation. Conduct this test at the same time the smoking/safety belt sign and aural speed warning device test is accomplished.

J. Inspection Discrepancies. If a discrepancy is discovered during the inspection, enter it on the appropriate job aid in the remarks section.

1) Inform the operator of the discrepancy. Advise the operator that if the aircraft is operated without correcting the discrepancy, he or she may be in violation of 14 CFR.

2) If necessary, issue FAA Form 8620-1 (Figure 6-6).

a) Attach the bottom card (buff) on the aircraft by the string. Place it so that the operator will easily see it.

b) Return the top and middle sheet (both white) to the airworthiness unit.

K. Review Job Aid. Upon completion of the inspection, review the job aid for any suspected violations. If an enforcement investigation is necessary see Related Task #182, Conduct an Investigation to Determine Compliance.

L. Conclude Inspection.

1) Discuss any pertinent safety information with the pilots or operator.

2) Return any documentation.

3) Advise the pilot or operator of any upcoming accident prevention or other safety meetings.

4) If no discrepancies were found, compliment the pilot or operator.

M. PTRS Report. Send a followup letter of correction (Figure 6-9) with a suspense date to remind a pilot or operator of noted discrepancies. Complete FAA Form 8000-36 in accordance with the PTRS field office manual. If the pilots or aircraft are not based in the inspector's district, forward a copy of the PTRS report and the job aid to the appropriate district office.

N. District Office File. File the job aids in accordance with normal office procedures.

6-102 TASK OUTCOMES. Completion of this task results in one or more of the following:

- An indication in the district office files of a satisfactory inspection
- An indication in the district office files of an unsatisfactory inspection
- A letter of correction
- An aircraft condition notice
- Information package sent to another district office

6-103 FUTURE ACTIVITIES.

- A pilot or operator may be subject to a compliance investigation if the inspection reveals a possible violation of 14 CFR.
- A followup inspection may be conducted to determine if any noted discrepancies have been corrected.

RESERVED. Paragraphs 6-104 through 6-118.

Figure 6-5, Part 91 Ramp Inspection Job Aid

| | | | | | |
|----------------------------|-------|---------------------|---------|--------------------|------|
| PILOT NAME/ADDRESS | | INSPECTION LOCATION | | DATE OF INSPECTION | |
| | | INSPECTOR NAME | | | |
| AIRCREW INFORMATION | | | | | |
| CERTIFICATES | | AIRMAN | | MEDICAL | |
| Name | Grade | Ratings | Number | Class | Date |
| 1. | | | | | |
| 2. | | | | | |
| 3. | | | | | |
| 4. | | | | | |
| 5. | | | | | |
| INSPECTION ITEMS | S | U | REMARKS | | |
| Pilot Certificates | | | | | |
| Pilot experience/qual. | | | | | |
| Biennial Flight Review | | | | | |
| AIRCRAFT DOCUMENTS | | | | | |
| Airworthiness Certificate | | | | | |
| Registration Certificate | | | | | |
| Radio Station License | | | | | |
| Operating Limitations | | | | | |
| Weight/Balance Information | | | | | |
| Minimum Equipment List | | | | | |
| Issued by N-Number | | | | | |
| Issued by Serial Number | | | | | |
| Letter of Authorization | | | | | |
| Inoperative Equipment | | | | | |
| Aeronautical Charts | | | | | |

| BASIC AIRCRAFT DATA | | | PAGE TWO |
|-----------------------|--------------------------|--------------------------|----------|
| N-Number | Make/Model | Owned/Leased (91.54) | |
| INSPECT AIRCRAFT | S | U | REMARKS |
| General Airworthiness | <input type="checkbox"/> | <input type="checkbox"/> | |
| ELT Battery | <input type="checkbox"/> | <input type="checkbox"/> | |
| VOR Check | <input type="checkbox"/> | <input type="checkbox"/> | |
| Seats/Safety Belts | <input type="checkbox"/> | <input type="checkbox"/> | |
| INSPECTION RESULTS | <input type="checkbox"/> | <input type="checkbox"/> | |
| REMARKS | | | |
| REGION | DISTRICT OFFICE | INSPECTOR'S SIGNATURE | |

Figure 6-6, FAA Form 8620-1, Aircraft Condition Notice

Figure 6-7, IFR Helicopter Letter of Approval

ABC Construction, Inc.

1234 Any Street

USA

Gentlemen:

ABC Construction, Inc., is authorized by this approval to conduct helicopter operations under instrument flight rules (IFR) in accordance with Special Federal Aviation Regulation (SFAR) No. 29, and the limitations contained herein. A copy of this approval and a copy of SFAR No. 29-4 will be set forth as a supplement to the rotorcraft flight manual, along with those operating limitations considered necessary for the safe operation of the rotorcraft in IFR operations, as incorporated in the operating limitations section. This letter of approval, the operating limitations, and a copy of SFAR No. 29-4 constitute a supplemental type certificate and must be on board the aircraft.

LIMITATIONS:

1. Only those helicopters listed, as follows, will be operated under this approval: (e.g., Bell Model 206, Serial No. 123245, Registration No. N54321).
2. For single pilot operation an approved and operable stability augmentation system SAS/autopilot may be used in lieu of a second in command. Otherwise, the minimum flightcrew must include a pilot in command and a second in command.
 - a. SAS/autopilot, make (XYZ) and model (123).
3. Each pilot must hold a rotorcraft-helicopter rating and an instrument helicopter rating (except as specified in paragraph 4).
4. For the purpose instrument instruction, each pilot in command must hold a flight instructor certificate with rotorcraft-helicopter and instrument-helicopter ratings. The second in command must hold a pilot's certificate with a rotorcraft-helicopter rating. The second pilot need not comply with paragraph 5 of this letter while undergoing the formal training program leading toward an instrument-helicopter rating.
5. Each PIC authorized single pilot approval must have satisfactorily accomplished an instrument proficiency check utilizing a stability augmentation system or autopilot in lieu of a second in command within the preceding 6 calendar-months.
6. Each pilot crewmember must have in his/her personal possession evidence of proficiency issued by an FAA inspector or authorized check pilot within the previous 6 calendar-months.
7. Each helicopter operated under instrument flight rules shall meet the instrument and

equipment requirements of 14 CFR section (§) 91.33 and the following additional equipment:

- a. An independently-powered standby attitude indicator.
- b. A heated pitot tube and static port, or equivalent means of preventing airspeed and static system malfunction due to icing.
- c. The required instruments per 14 CFR sections (§§) 27.771 and 27.1321, or §§ 29.771 and 29.1321, as appropriate.
- d. The pilot in command must use a boom mike. The transmitter must be capable of being activated through a device located on the flight controls.

The instruments and equipment must be operable. A complete set of flight controls shall be installed and operable at each pilot station, except that single pilot approval will require a set of flight controls only at the PIC station.

8. In accordance with paragraph 4 of SFAR No. 29-4, fuel reserve required by 14 CFR § 91.23(a)(3) may be reduced to 30 minutes.

9. ABC Construction, Inc., will provide immediate notification to the Flight Standards District Office issuing this approval of any “hazardous” flight conditions encountered during IFR operations under SFAR No. 29-4.

This approval will remain in effect until such time as it is surrendered, revoked, or otherwise terminated, or a change in the aircraft ownership takes place.

John P. Brown,
Manager

Figure 6-8, Ramp Inspection Flowchart

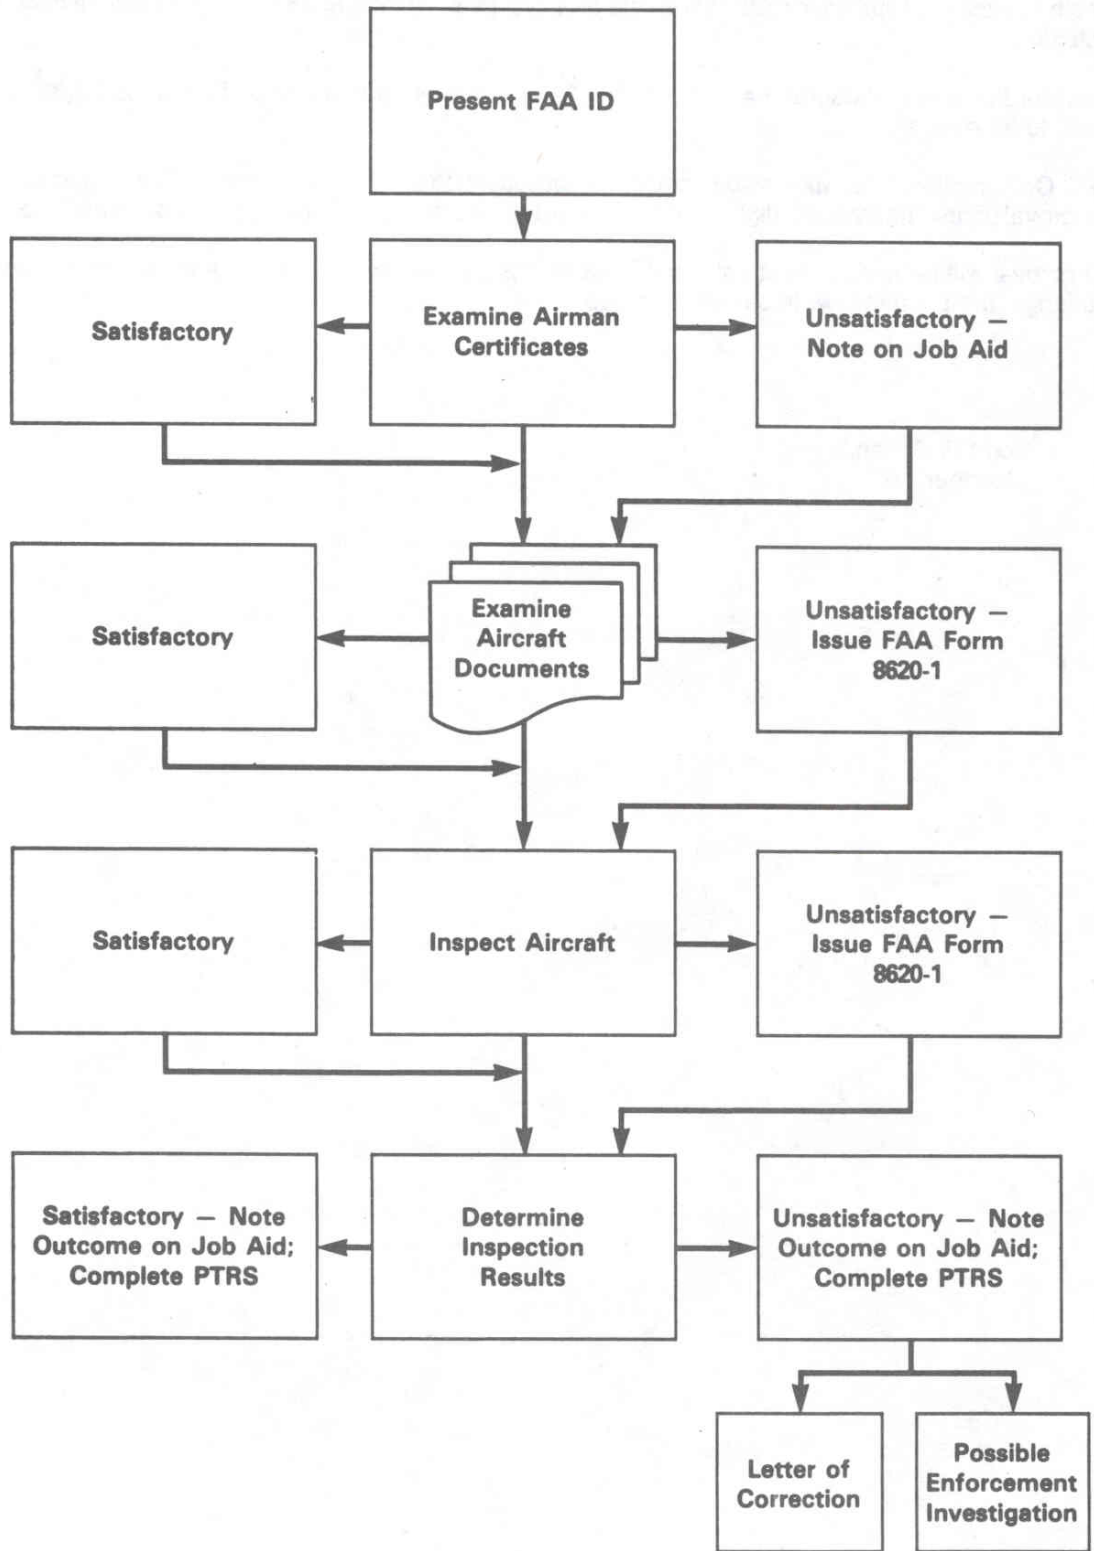


Figure 6-9, Letter of Correction

FAA LETTERHEAD

Addressed to pilot/operator

Dear _____:

This letter is to notify you that an inspection of your [insert either documents or aircraft; if aircraft, indicate the make, model, and N-Number] on [insert date of the inspection] at [insert location] revealed deficiencies in the following:

List specific items and the related 14 CFR (e.g., MEL letter of authorization not carried on board the aircraft, Ref. 14 CFR § 91.213).

Your prompt attention to correcting these items is appreciated. Please respond to this office within 10 days to indicate your corrective action. If we may be of assistance, please call [include telephone number and operating hours of the district office].

Sincerely,

Signed by the inspector conducting the inspection